


MODEL NUMBER	NOMINAL SIZE (INCHES) HXWXD	ACTUAL SIZE (INCHES) HXWXD	RATED AIR FLOW (CFM)'	INITIAL RESISTANCE (In. W.G.)	MEDIA AREA (SQUARE FEET)	MERV RATING
LG4-904	24X24X4	23-3/8X23-3/8X3-3/4	2000	.43	49.1	14
LG4-912	20X25X4	19-3/8X24-3/8X3-3/4	1750	.43	42.7	14
LG4-915	20X24X4	19-3/8X23-3/8X3-3/4	1650	.43	40.9	14
LG4-913	20X20X4	19-3/8X19-3/8X3-3/4	1400	.43	33.9	14
LG4-910	16X25X4	15-3/8X24-3/8X3-3/4	1400	.43	34.1	14
LG4-909	16X20X4	15-3/8X19-3/8X3-3/4	1100	.43	27.1	14
LG4-903	12X24X4	11-3/8X23-3/8X3-3/4	1000	.43	23.4	14
LG4-604	24X24X4	23-3/8X23-3/8X3-3/4	2000	.23	49.1	11
LG4-612	20X25X4	19-3/8X24-3/8X3-3/4	1750	.23	42.7	11
LG4-615	20X24X4	19-3/8X23-3/8X3-3/4	1650	.23	40.9	11
LG4-613	20X20X4	19-3/8X19-3/8X3-3/4	1400	.23	33.9	11
LG4-610	16X25X4	15-3/8X24-3/8X3-3/4	1400	.23	34.1	11
LG4-609	16X20X4	15-3/8X19-3/8X3-3/4	1100	.23	27.1	11
LG4-603	12X24X4	11-3/8X23-3/8X3-3/4	1000	.23	23.4	11

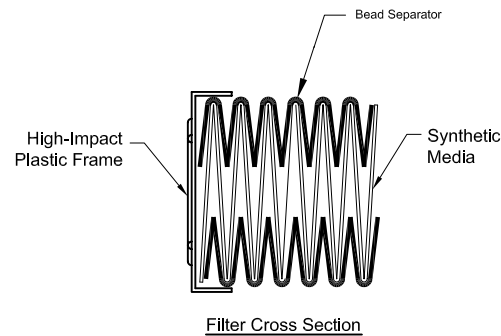

STANDARD CONSTRUCTION

1. 100% Synthetic Media
2. Bead Separator Packs
3. High-Impact Plastic Frame Panels
4. Foamed Hot Melt Sealant

NOTES

1. Testing for ASHRAE 52.2-1999
2. Final Resistance: 1.5" W.G.
3. Rated Velocity - 500 FPM
4. Maximum Operating Temperature: 140 deg. F
5. Class 1 Filter per UL Standard 900
6. Special Sizes Not Available



P.O. Box 32578
 Louisville, KY 40232
 P: 866-247-4827
 F: 502-961-0930

CONTACT FACTORY TO
 VERIFY REVISION LEVEL

**TOLERANCES
 UNLESS OTHERWISE SPECIFIED**

FRACTIONAL -
 DECIMAL -
 ANGLES -

ALL DIMENSIONS IN INCHES

DRAWING NAME

4" LEGACY

APPROVED BY

K. Quinn

SPECIFICATION NO.

MKT-B-00527

PAGE

1 OF 1

SCALE

NONE

DWG. SIZE

A

REVISION

C

REVISION DATE

02-05-08

CONFIDENTIAL - DO NOT COPY. THIS MATERIAL IS TRADE SECRET AND PROPRIETARY BEING EXCLUSIVELY OWNED BY CLC AIR. THE EXPRESSION OF THE INFORMATION CONTAINED HEREIN IS PROTECTED UNDER FEDERAL COPYRIGHT LAWS AND ALL COPYING IS PROHIBITED AND MAY BE SUBJECT TO CRIMINAL PENALTIES.