


Model Number*	Nominal Size (Inches) H x W x D	Actual Size (Inches) H x W x D	Rated Air Flow (CFM)	Initial Resistance (IN W.G.)			Media Area (Square Feet)
				90-95%	80-85%	60-65%	
VMB_04-HT-500	24 x 24 x 12	23-3/8 x 23-3/8 x 11-1/2	2000	.65	.55	.40	124
VMB_13-HT-500	20 x 20 x 12	19-3/8 x 19-3/8 x 11-1/2	1400	.65	.55	.40	82
VMB_03-HT-500	12 x 24 x 12	11-3/8 x 23-3/8 x 11-1/2	1000	.65	.55	.40	24

* - Insert Filter Efficiency (9 = 90-95%, 8 = 80-85%, 6 = 60-65%). Example VMB-904-HT-500 is 90-95%, 24x24x12 Nominal Size

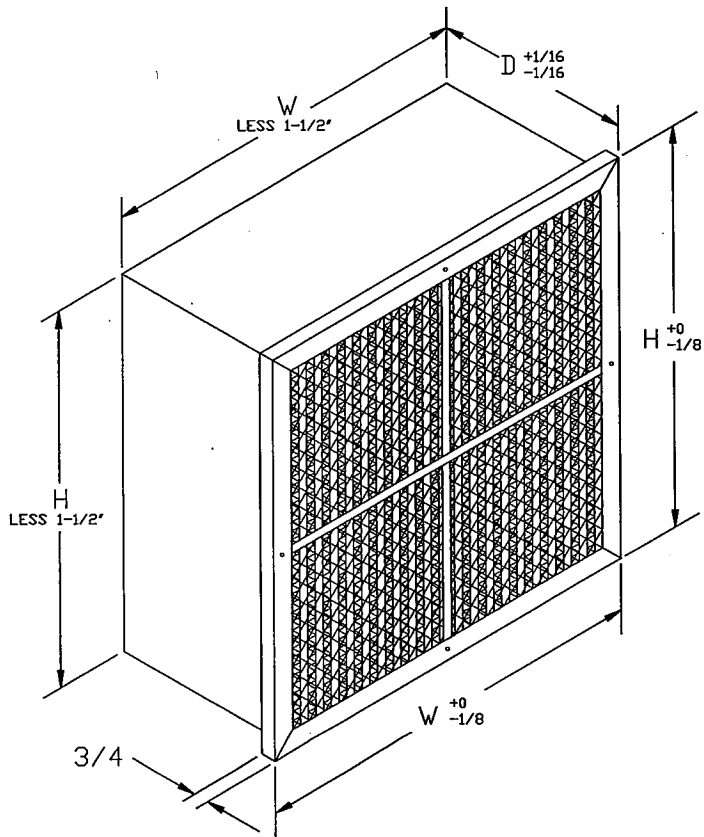


STANDARD CONSTRUCTION

1. High Efficiency, Microglass Paper Media
2. Corrugated Aluminum Separators With Rolled Edges
3. High Loft Microglass Wrap Around Media Pack
4. 24 Gauge Aluminized Steel Cell Sides
5. Header on Air Entering Side: Single Piece U-Channel
6. Expanded Metal Grid With Cross Bar Brace Both Sides
7. High Temperature Glass Rope Gasket on Air Leaving Side of Header


NOTES

1. Average Efficiency, MERV
 - 90-95% ASHRAE 52.1-1992, MERV 14 ASHRAE 52.2-1999
 - 80-85% ASHRAE 52.1-1992, MERV 13 ASHRAE 52.2-1999
 - 60-65% ASHRAE 52.1-1992, MERV 11 ASHRAE 52.2-1999
2. Final Resistance: 1.2" W.G.
3. Rated Velocity 12" Deep - 500 FPM
4. Class 1 Filter Per U.L. Standard 900
5. Maximum Operating Temperature: 500 deg. F
6. Special Sizes Available

 ONE SOURCE FOR AIR FILTRATION PRODUCTS	P.O. Box 32578 Louisville, KY 40232 P: 502-969-2304 F: 502-961-0930	TOLERANCES		DRAWING NAME		
		UNLESS OTHERWISE SPECIFIED		VARIFLOW HT-500		
CONTACT FACTORY TO VERIFY REVISION LEVEL		FRACTIONAL	APPROVED BY <i>KCO</i>		SPECIFICATION NO.	PAGE
		DECIMAL			MKT-B-00147	1 OF 1
ANGLES	SCALE	DWG. SIZE			REVISION	REVISION DATE
	NONE	A	B	11-17-05		
ALL DIMENSIONS IN INCHES		<small>CONFIDENTIAL - DO NOT COPY. THIS MATERIAL IS TRADE SECRET AND PROPRIETARY BEING EXCLUSIVELY OWNED BY AIRGUARD. THE EXPRESSION OF THE INFORMATION CONTAINED HEREIN IS PROTECTED UNDER FEDERAL COPYRIGHT LAWS AND ALL COPYING IS PROHIBITED AND MAY BE SUBJECT TO CRIMINAL PENALTIES.</small>				

Model Number*	Nominal Size (Inches) H x W x D	Actual Size (Inches) H x W x D	Rated Air Flow (CFM)	Initial Resistance (IN W.G.)			Media Area (Square Feet)
				90-95%	80-85%	60-65%	
VMB_04-HT-750	24 x 24 x 12	23-3/8 x 23-3/8 x 11-1/2	2000	.68	.60	.46	139
VMB_13-HT-750	20 x 20 x 12	19-3/8 x 19-3/8 x 11-1/2	1400	.68	.60	.46	92
VMB_03-HT-750	12 x 24 x 12	11-3/8 x 23-3/8 x 11-1/2	1000	.68	.60	.46	28

* - Insert Filter Efficiency (9 = 90-95%, 8 = 80-85%, 6 = 60-65%). Example VMB-904-HT-750 is 90-95%, 24x24x12 Nominal Size

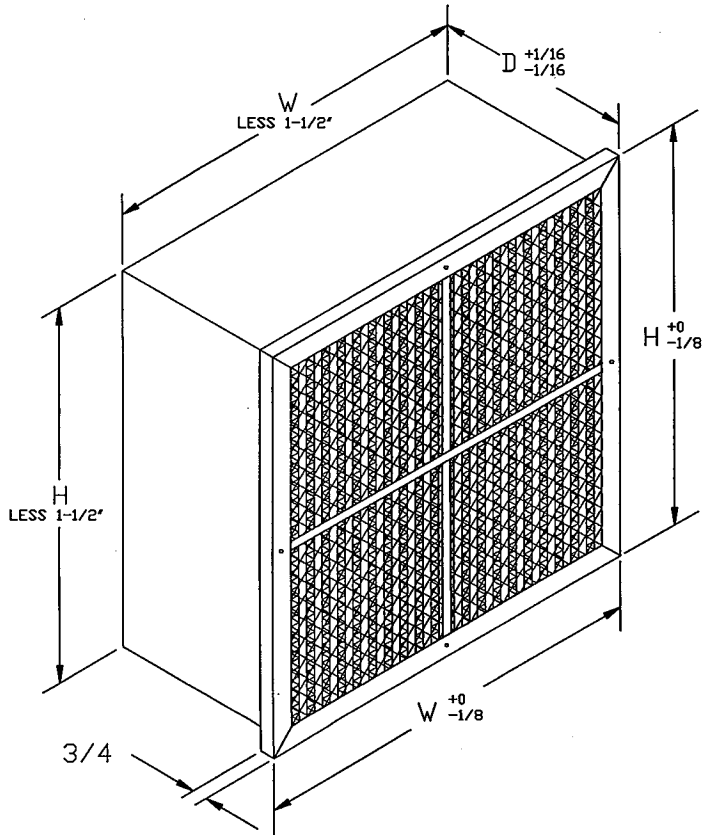



STANDARD CONSTRUCTION

1. High Efficiency, Microglass Paper Media
2. Corrugated Aluminum Separators With Rolled Edges
3. High Loft Microglass Wrap Around Media Pack
4. 24 Gauge Aluminized Steel Cell Sides
5. Header on Air Entering Side: Single Piece U-Channel
6. Expanded Metal Grid With Cross Bar Brace Both Sides
7. High Temperature Glass Rope Gasket on Air Leaving Side of Header


NOTES

1. Average Efficiency, MERV
90-95% ASHRAE 52.1-1992, MERV 14 ASHRAE 52.2-1999
80-85% ASHRAE 52.1-1992, MERV 13 ASHRAE 52.2-1999
60-65% ASHRAE 52.1-1992, MERV 11 ASHRAE 52.2-1999
2. Final Resistance: 1.2" W.G.
3. Rated Velocity 12" Deep - 500 FPM
4. Class 1 Filter Per U.L. Standard 900
5. Maximum Operating Temperature: 750 deg. F
6. Special Sizes Available

 <p>ONE SOURCE FOR AIR FILTRATION PRODUCTS</p>	<p>P.O. Box 32578 Louisville, KY 40232 P: 502-969-2304 F: 502-961-0930</p>	TOLERANCES		DRAWING NAME	
		UNLESS OTHERWISE SPECIFIED		VARIFLOW HT-750	
<p>CONTACT FACTORY TO VERIFY REVISION LEVEL</p>		FRACTIONAL	APPROVED BY 		SPECIFICATION NO.
		DECIMAL	MKT-B-00136		PAGE
ANGLES	SCALE NONE		DWG. SIZE A	REVISION C	REVISION DATE 03-03-06
ALL DIMENSIONS IN INCHES		<p>CONFIDENTIAL - DO NOT COPY. THIS MATERIAL IS TRADE SECRET AND PROPRIETARY BEING EXCLUSIVELY OWNED BY AIRGUARD. THE EXPRESSION OF THE INFORMATION CONTAINED HEREIN IS PROTECTED UNDER FEDERAL COPYRIGHT LAWS AND ALL COPYING IS PROHIBITED AND MAY BE SUBJECT TO CRIMINAL PENALTIES.</p>			

Model Number*	Nominal Size (Inches) H x W x D	Actual Size (Inches) H x W x D	Rated Air Flow (CFM)	Initial Resistance (IN W.G.)			Media Area (Square Feet)
				90-95%	80-85%	60-65%	
VMB_04-HT-900	24 x 24 x 12	23-3/8 x 23-3/8 x 11-1/2	2000	.71	.65	.58	183
VMB_13-HT-900	20 x 20 x 12	19-3/8 x 19-3/8 x 11-1/2	1400	.71	.65	.58	125
VMB_03-HT-900	12 x 24 x 12	11-3/8 x 23-3/8 x 11-1/2	1000	.71	.65	.58	35

* - Insert Filter Efficiency (9 = 90-95%, 8 = 80-85%, 6 = 60-65%). Example VMB-904-HT-900 is 90-95%, 24x24x12 Nominal Size

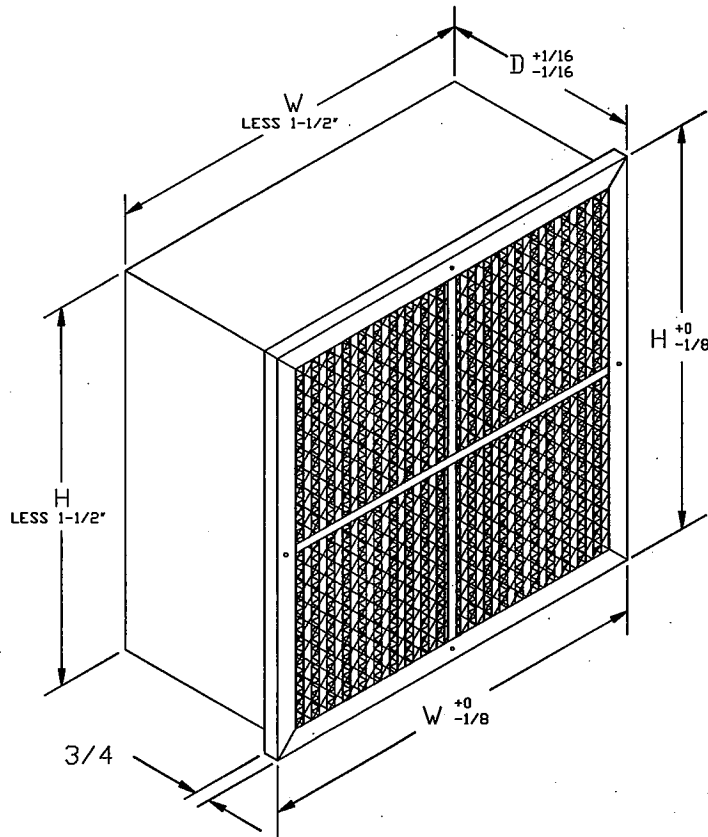

STANDARD CONSTRUCTION

1. High Efficiency, Microglass Paper Media
2. Corrugated Aluminum Separators With Rolled Edges
3. High Loft Microglass Wrap Around Media Pack
4. 24 Gauge Aluminized Steel Cell Sides
5. Header on Air Entering Side: Single Piece U-Channel
6. Expanded Metal Grid With Cross Bar Brace Both Sides
7. High Temperature Glass Rope Gasket on Air Leaving Side of Header

NOTES

1. Average Efficiency, MERV
90-95% ASHRAE 52.1-1992, MERV 14 ASHRAE 52.2-1999
80-85% ASHRAE 52.1-1992, MERV 13 ASHRAE 52.2-1999
60-65% ASHRAE 52.1-1992, MERV 11 ASHRAE 52.2-1999
2. Final Resistance: 1.2" W.G.
3. Rated Velocity 12" Deep - 500 FPM
4. Class 1 Filter Per U.L. Standard 900
5. Maximum Operating Temperature: 900 deg. F
6. Special Sizes Available

AIRGUARD ONE SOURCE FOR AIR FILTRATION PRODUCTS
P.O. Box 32578
Louisville, KY 40232
P: 502-969-2304
F: 502-961-0930

CONTACT FACTORY TO VERIFY REVISION LEVEL

TOLERANCES UNLESS OTHERWISE SPECIFIED

- FRACTIONAL
- DECIMAL
- ANGLES

ALL DIMENSIONS IN INCHES

DRAWING NAME: **VARIFLOW HT-900**

APPROVED BY: *R. O. ...* SPECIFICATION NO. MKT-B-00148 PAGE 1 OF 1

SCALE: NONE DWG. SIZE: A REVISION: C REVISION DATE: 12-22-05

CONFIDENTIAL - DO NOT COPY. THIS MATERIAL IS TRADE SECRET AND PROPRIETARY BEING EXCLUSIVELY OWNED BY AIRGUARD. THE EXPRESSION OF THE INFORMATION CONTAINED HEREIN IS PROTECTED UNDER FEDERAL COPYRIGHT LAWS AND ALL COPYING IS PROHIBITED AND MAY BE SUBJECT TO CRIMINAL PENALTIES.