



Process Equipment

Air-Operated Pumps and Accessories for Process Industries



PROVEN QUALITY. LEADING TECHNOLOGY.

Superior Pumping Technology



AIR-OPERATED PUMPS

The Most Durable Piston and Diaphragm Pumps!

At Graco®, we provide durable pumping solutions for your applications. Every pump is manufactured with your productivity in mind – providing you a more reliable, efficient pump!

- **Rugged construction** resists corrosion and ensures clean fluid changes.
- **Heavy-duty design** offers long life, increased productivity and lower overall cost of ownership.
- **Air-powered** for increased reliability and lower costs.
- **Pneumatically driven** for increased reliability and power on demand service.



KEY FLUIDS

- Paints, stains, coatings, inks and dyes
- Chemicals
- Acids
- Corrosive and abrasive fluids
- Lubricants
- Ceramic glazes
- Sludge, slurry and waste fluid
- Soaps, detergents and solvents



KEY APPLICATIONS

- Transferring fluids from drums
- Sanitizing buildings and equipment
- Removing waste fluid
- Unloading fluids
- Draining tanks and sumps
- Transferring high temperature acids
- Skimming and transferring oil
- Servicing lubrication equipment



THE LONGEST WARRANTY AVAILABLE IN THE INDUSTRY!

Graco is so confident in the design of our Husky products and the manufacturing process, we offer an extended warranty on most products – including the longest warranty in the industry for diaphragm pumps!

Perfect for a Wide Range of Applications

Bulk Tank Supply and Evacuation

Husky™ air-operated double diaphragm pumps are ideal for unloading above or below ground tanks of any size. They are available in a wide range of materials of construction in sizes including: 1/4 in (6.3 mm), 3/8 in (9.4 mm), 1/2 in (12.7 mm), 3/4 in (19.1 mm), 1 in (25.4 mm), 1-1/2 in (38.1 mm), 2 in (50.8 mm) and 3 in (76.2 mm).



55 Gallon Drum Transfer and Supply

Pump from your 55 gallon drums with ease with one of two styles of pumps – double diaphragm or piston evacuation. They offer flow rates up to 12 gpm, and are available in several materials of construction including: aluminum, carbon steel, stainless steel, polypropylene and acetal.



Maintenance and Production Cleaning

Designed for rugged dependability, pneumatically-driven pumps offer simplicity in design, operation and maintenance. They provide high pressure for water and cleaning chemicals up to 3,000 psi, and flow rates up to 9 gpm.



Air-Operated Double Diaphragm Pumps

Model Overview



MODEL	HUSKY 205	HUSKY 307	HUSKY 515	HUSKY 716
Connection Size	1/4 in (6.3 mm)	3/8 in (9.4 mm)	1/2 in (12.7 mm) or 3/4 in (19.1 mm)	3/4 in (19.1 mm)
Maximum Flow Rate*	5 gpm (19 lpm)	7 gpm (26 lpm)	15 gpm (57 lpm)	16 gpm (61 lpm)
Materials of Construction Available	Polypropylene, Kynar (PVDF), Acetal	Polypropylene, Acetal	Polypropylene, Kynar (PVDF), Acetal	Aluminum, 316 Stainless Steel
Center Section Available	Polypropylene	Coated Aluminum	Polypropylene	Polypropylene
Typical Fluids Handled	Waterborne materials, paint, coatings, inks, car wash chemicals	Paints, lubricants, inks, stains, solvents, coatings and dyes	Cleaning fluids, detergents, chemicals, ceramic glazes, inks	Oil, water and most solvents
Manual Number	308652	308553	308981	308981

*Flow rates are with muffler and do not vary based on diaphragm material
 Note: Husky 307 and Husky 3275 are only available with standard air valves. All other pumps are available with standard or remote air valves

Accessories



FLANGE KIT

- Converts a thread pump connection to ANSI
- Converts ANSI pump connection to thread



INLET FLOW CONTROL

- Agitators or mixers that keep fluid in suspension within a tank, vat or drum



MUFFLERS

- Reduces sound level of pump during exhaust
- Comes standard on all Graco models



AIR INLET CONTROL

- Regulators control speed and pressure of pump



HUSKY 1040

1 in (25.4 mm)

40 gpm
(151 lpm)

Polypropylene,
Kynar (PVDF),
Aluminum,
316 Stainless Steel

Coated Aluminum,
316 Stainless Steel

Chemicals, contaminated
surface water, acids,
adhesives and varnishes

Plastic: 308443
Metal: 308479

HUSKY 1590

1-1/2 in (38.1 mm)

90 gpm
(340 lpm)

Polypropylene,
Kynar (PVDF),
Aluminum,
316 Stainless Steel

Coated Aluminum,
316 Stainless Steel

Chemicals, corrosive fluids,
acids, latex, abrasive fluids,
slurries and sludge

Plastic: 308549
Metal: 308441

HUSKY 2150

2 in (50.8 mm)

150 gpm
(568 lpm)

Polypropylene,
Kynar (PVDF),
Aluminum,
316 Stainless Steel,
Ductile Iron

Coated Aluminum,
316 Stainless Steel

Acids, gases, ship cleaning,
stripping chemicals, alkalies,
solvents, paints and varnishes

Plastic: 308550
Metal: 308368

HUSKY 3275

3 in (76.2 mm)

275 gpm
(1041 lpm)

Aluminum

Coated Aluminum

Chemicals, bulk paint resins
and ceramic slip

308639



OUTLET CONTROL

- Surge suppressor reduces pressure spikes during pump changeover
- Filter and strainer removes large particles from out-bound fluid stream



LEAK DETECTOR

- Contains leakage if diaphragm fails
- Signals automatic pump shut down and sounds optional alarm



CYCLEFLO™

- Controls speed and pressure on remote pumps
- Used in dosing applications

The Husky Diaphragm Pump Advantage

The Simplicity of the Husky Air Valve

Our Husky air-operated double diaphragm pumps feature extremely reliable, externally serviceable air valves – making these Husky pumps among the best in the industry!



Top view of air valve

FEATURES AND BENEFITS

- Fewer moving parts means increased durability and less repair time
- Three-way pilot valve for true non-sticking operation
- Externally serviceable for quick, inexpensive repairs
- The elimination of o-rings and a spool valve prevents centering; a common problem with competitive pumps
- Lube-free for cleaner operation – essential when handling food products


Reduce Downtime and Save Money!

When it comes to chemical, sanitary and ink applications, it's tough to beat these Graco pumps! Our Husky air-operated double diaphragm pumps are loaded with features to help you get the job done right, every time, and are built to save you money.

Graco Air Valve



Competitor Air Valve

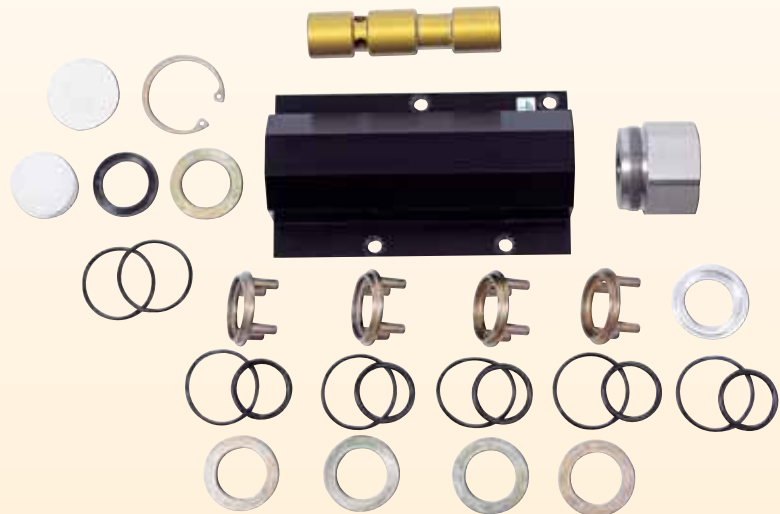

System Components

A EASY MAINTENANCE

- Low internal volume reduces waste and makes clean-up easy
- Stainless steel bolts resist corrosion and provide positive positioning for easy reassembly

B UNIQUE, PATENTED AIR VALVE

- Three-way pilot valve for no-stick operation
- All parts are easily accessible
- No air-line lubrication required

C PRECISION-FITTED PARTS

- Long-wearing end bearings assure positive rod alignment and are easy to replace

D PROTECTIVE EXHAUST PORT

- Common port for all exhaust prevents vapors in room from attacking air motor seals
- Easily submerges for sump or disposal operations sitting idle

E RUGGED EXTERIOR CONSTRUCTION

- Construction resists corrosion, prevents leakage and ensures clean fluid changes
- Aluminum center sections are epoxy coated
- Corrosion resistant centers are 316 stainless steel

F FLUID COMPATIBILITY

- Housings available in aluminum, stainless steel, ductile iron, polypropylene, groundable acetal or Kynar

G POSITIVE SEAL DESIGN

- Diaphragm firmly locked in place
- Formed bead acts as a positive fluid seal
- One thru-hole

H HEAVY DUTY DIAPHRAGM PLATES

- Positive grip plates virtually eliminate leakage and pull-out, preventing costly downtime



I LONG LASTING ROD DESIGN

- 300 Series stainless steel rod designed for long life and corrosion resistance — even in wet air

J EASY ALIGNMENT

- Bolted, self-aligning air and fluid sections

K CHOICE OF ELASTOMERS

- Wide range of seat and ball options ensure fluid compatibility and positive seal for maximum efficiency, long life and better suction lift

Transfer Pumps



FAST-FLO® 1:1



HUSKY 515 TRANSFER



HUSKY 716 TRANSFER

Air-Powered for High Reliability at an Affordable Price!

Perfect for low to medium viscosity fluids and shear sensitive materials. Transfer pumps offer superior reliability at an affordable price!

PISTON PUMPS

- Flow rates up to 5 gpm
- Stainless steel and carbon steel options
- Drum length versions have inlet immersed in material for quicker priming of heavier fluid
- Immersed inlets hold prime better than non-immersed
- Available with optional stubby and drum length models
- Air-powered for high reliability and low cost
- Plate (flat) check options for lower viscosity fluids
- UL and CE options available when installed in accordance with NFPA

HUSKY TRANSFER PUMPS

- Excellent for abrasive, low to medium viscosity fluids and shear sensitive materials
- Suction tube is immersed inside the drum – not the pump
- Quick-priming and immediate flow of product
- Handles fluid viscosities up to 5,000 cps and solids up to 0.09 in (2.29 mm)
- Runs dry without damaging the pump
- Provides air tight seal for moisture-sensitive fluids
- Bung adapter fits into any 2 in (50.8 mm) bung opening
- Easy-out seal provides fast slide in and out of drums without disconnecting hoses and accommodates slightly off-sized drums up to 2-1/2 in (63.5 mm)

Hydra-Clean® Pumps

On-Demand High Pressure Cleaning Pumps

Graco Hydra-Clean heavy-duty pressure washers support multiple guns and are perfect for use in a variety of in-plant cleaning applications.

FEATURES AND BENEFITS

- Versatility in variable pressure, flow and chemical injection provides best cleaning action
- Available with chemical injectors and accumulators
- Configurations available to fit most in plant application requirements
- On demand supply pump stops when valve is closed and runs when valve open
- Does not require an automatic shut off when not in use
- Cleaning chemical passes through pump, providing concentrate levels above 5%
- Supports multiple guns
- For use with cold or hot water up to 200°F (93°C)

TYPICAL APPLICATIONS

- Oil refineries
- Vehicle fleets, buses and transit systems
- Heavy construction equipment, off-highway vehicles
- General industrial equipment
- Sanitizing



**NXT
WALL MOUNT**



**NXT
CART MOUNT**




**NXT
CART MOUNT
(VIEW FROM BACK)**

Selection Key

Diaphragm Pump Designation

Part numbers are located on ID tag on center section of all Husky diaphragm pumps.

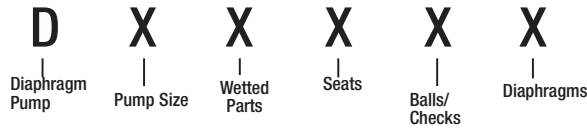


PUMP SIZE (AIR MOTOR TYPE AND MATERIAL)	WETTED PARTS	SEATS	BALLS	DIAPHRAGM
1 = 1/4" (6.35 mm) Standard: polypropylene center section 2 = 1/4" (6.35 mm) Remote: polypropylene center section 3 = 3/8" (9.52 mm) Standard: polypropylene center section 5 = 1/2" (12.7 mm) Standard: polypropylene center section 4 = 1/2" (12.7 mm) Remote: polypropylene center section 5 = 3/4" (19.05 mm) Standard: polypropylene center section 4 = 3/4" (19.05 mm) Remote: polypropylene center section 7 = 1" (25.4 mm) Standard: aluminum center section 8 = 1" (25.4 mm) Remote: aluminum center section R = 1" (25.4 mm) Standard: stainless steel center section B = 1-1/2" (38.1 mm) Standard: aluminum center section C = 1-1/2" (38.1 mm) Remote: aluminum center section T = 1-1/2" (38.1 mm) Standard: stainless steel center section F = 2" (50.8 mm) Standard: aluminum center section G = 2" (50.8 mm) Remote: aluminum center section V = 2" (50.8 mm) Standard: stainless steel center section K = 3" (76.2 mm) Standard: aluminum center section	1 = Acetal (npt) 2 = Poly (npt) 3 = Aluminum (npt) 4 = Stainless Steel (npt) 5 = Kynar (npt) 6 = Ductile Iron (npt) A = Acetal * (bsp) B = Poly * (bsp) C = Aluminum (bsp) D = Stainless Steel (bsp) E = Kynar (bsp) F = Ductile Iron (bsp) H = 2 npt Alum Extended G = 2 bsp Alum Extended	2 = Acetal 3 = Stainless Steel 4 = Hardened SST 5 = Hytrel 6 = Santoprene 7 = Buna N 8 = Viton 9 = Polypropylene A = Kynar G = Geolast B = SST with viton seal C = Santoprene with viton seal	1 = PTFE 2 = Acetal 3 = Stainless Steel 4 = Hardened SST 5 = Hytrel 6 = Santoprene 7 = Buna N 8 = Viton 9 = Polypropylene A = Kynar G = Geolast	1 = PTFE 5 = Hytrel 6 = Santoprene 7 = Buna N 8 = Viton G = Geolast

* = BSP plastic in 1/2" (12.7mm) pumps
 ≥1" Plastic pumps flange connections
 3" Aluminum pumps flange connections

Diaphragm Pump Kit Designation

When selecting a kit, use the same code numbers as for the pumps regarding pump size, seat, ball/checks and diaphragm.



Pump Size	Seats	Balls/Checks	Diaphragm
1 = 1/4 in (6.35 mm) 3 = 3/8 in (9.52 mm) 5 = 1/2 in (12.7 mm) and 3/4 in (19.05 mm) 7 = 1 in (25.4 mm) metal pump 8 = 1 in (25.4 mm) plastic pump B = 1-1/2 in (38.1 mm) metal pump C = 1-1/2 in (38.1 mm) plastic pump F = 2 in (50.8 mm) metal pump G = 2 in (50.8 mm) plastic pump K = 3 in (76.2 mm)	0 = No seat 2 = Acetal 3 = Stainless Steel 4 = Hardened SST 5 = Hytrel 6 = Santoprene 7 = Buna N 8 = Viton 9 = Poly A = Kynar B = SST with viton seal C = Santoprene with viton seal G = Geolast	1 = PTFE 2 = Acetal 3 = Stainless Steel 4 = Hardened SST 5 = Hytrel 6 = Santoprene 7 = Buna-N 8 = Viton 9 = Poly A = Kynar G = Geolast 0 = No Balls/Checks	1 = PTFE 5 = Hytrel 6 = Santoprene 7 = Buna-N 8 = Viton G = Geolast 0 = No Diaphragm

Ordering Information

PISTON PUMPS

Part Number	Pump Material	Seat Material	Packings	Certificates
226940	Carbon Steel	Disc	PTFE/Leather	UL, CE
226941	Carbon Steel	Disc	Polyethylene	UL
226942	Stainless Steel	Ball	Polyethylene	UL
226944	Carbon Steel	Disc	Polyethylene	UL, CE
226945	Stainless Steel	Ball	Polyethylene	UL
226946	Carbon Steel	Ball	PTFE	
237129	Stainless Steel	Ball	PTFE	
237132	Stainless Steel	Ball	PTFE	

HYDRA-CLEAN NXT PUMPS

Package Order No.	247549 or 247550	247551 or 247552	247553 or 247554
Pump Assembly Part No.	N34DN0	N65DN0	N65DN0
Pump Lower Part No.	247599	241648	687055
Construction	SST	SST	SST
Standard Seal Repair Kit Construction	247881 UHMWPE/CF-PTFE	222880 UHMWPE/CF-PTFE	See manual 311825 UHMWPE/CF-PTFE
Optional Seal Repair Kits Construction	207581 PTFE	222875 UHMWPE/PTFE	222845 UHMWPE/PTFE
Motor Repair Kit	See manual 311238	See manual 311238	See manual 311238

TRANSFER PUMPS

Part Number	Description	Tube Type
233051	D52911	Polypropylene tube
233052	D51211	Stainless Steel tube
233053	D51211	Aluminum tube
233054	D53266	Aluminum tube
233055	D53277	Aluminum tube
233056	D53211	Aluminum tube
233057	D54311	Stainless Steel tube



ABOUT GRACO

PROVEN QUALITY. LEADING TECHNOLOGY.

Founded in 1926, Graco is a world leader in fluid handling systems and components. Graco products move, measure, control, dispense and apply a wide range of fluids and viscous materials used in vehicle lubrication, commercial and industrial settings.

The company's success is based on its unwavering commitment to technical excellence, world-class manufacturing and unparalleled customer service. Working closely with qualified distributors, Graco offers systems, products and technology that set the quality standard in a wide range of fluid handling solutions. Graco provides equipment for spray finishing, protective coating, paint circulation, lubrication, and dispensing sealants and adhesives, along with power application equipment for the contractor industry. Graco's ongoing investment in fluid management and control will continue to provide innovative solutions to a diverse global market.

GRACO LOCATIONS

MAILING ADDRESS

P.O. Box 1441
Minneapolis, MN 55440-1441
Tel: 612.623.6000
Fax: 612.623.6777

AMERICAS

MINNESOTA

Worldwide Headquarters
Graco Inc.
88-11th Avenue N.E.
Minneapolis, MN 55413

EUROPE

BELGIUM

European Headquarters
Graco N.V.
Industrieterrein-Oude Bunders
Slakweidestraat 31
3630 Maasmechelen,
Belgium
Tel: 32.89.770.700
Fax: 32.89.770.777

ASIA PACIFIC

AUSTRALIA

Graco Australia Pty Ltd
P.O. Box 558
Level 2 / 541 Blackburn Rd.
Mount Waverley VIC 3149
Australia
Tel: 61.3.9550.0848
Fax: 61.3.9550.0816

CHINA

Graco Hong Kong Ltd.
Shanghai Representative Office
Room 118 1st Floor
No.2 Xin Yuan Building
No.509 Cao Bao Road
Shanghai, P.R. China 200233
Tel: 86.21.649.50088
Fax: 86.21.649.50077

INDIA

Graco Hong Kong Ltd.
India Liaison Office
Room 103, Level 4, Augusta Point
Golf Course Road
Gurgaon, Haryana, India 122001
Tel: +91.124.435.4208
Fax: +91.124.435.4001

JAPAN

Graco K.K.
1-27-12 Hayabuchi
Tsuzuki-ku
Yokohama City, Japan 2240025
Tel: 81.45.593.7300
Fax: 81.45.593.7301

KOREA

Graco Korea Inc.
Choheung Bank Building
4th Floor #1599
Gwanyang-Dong, Dongan-Ku,
Anyang-Si, Gyunggi-Do,
Korea 431-060
Tel: 82(Korea).31.476.9400
Fax: 82(Korea).31.476.9801

SALES/ DISTRIBUTION/ SERVICE

Call today for product information or to request a demonstration.

877.84GRACO (1-877-844-7226) or visit us at www.graco.com.

Graco Inc. is registered to I.S. EN ISO 9001

North America
Industrial Customer Service
800-328-0211
FAX 877-340-6427