



# Xtreme-Duty™

High Pressure Airless Hose



## Features and benefits

- Complete line of hoses for all your high pressure spraying
- Color-coded by pressure to take the guesswork out of using the right hose
- Durable design meets exacting standards and reduces downtime
- Easy-to-order, configurable part numbering system

PROVEN QUALITY. LEADING TECHNOLOGY.



# The Right Hose for the Job

## Technical Specifications

**Working pressure** . . . . . 4500 psi (310 bar), 5600 psi (386 bar), 7250 psi (500 bar)  
**Temperature rating** (all sizes) . . . . . -40 to 180° F (-40 to 82°C)  
**Chemical resistance** . . . . . Hose cover resistant to a wide variety of solvents, acids and bases  
**Weather resistance** . . . . . Hose cover has outstanding resistance to oxygen, ozone, sunlight and general weather conditions

**Electrical properties** . . . . . Conductive hose

Xtreme-Duty airless high pressure hose has passed the following quality and performance tests:

- Impulse
- Burst
- Cold Bend
- Flexibility
- Change of Length
- Visual Inspections

## Xtreme-Duty High Pressure Hoses

### Xtreme-Duty 4500 psi (310 bar) High Pressure Hose

Part #	Length	Diameter	Female NPSM
H42503	3 ft (0.9 m)	1/4 in (6.4 mm)	1/4 in
H42506	6 ft (1.8 m)	1/4 in (6.4 mm)	1/4 in
H42510	10 ft (3.0 m)	1/4 in (6.4 mm)	1/4 in
H42525	25 ft (7.6 m)	1/4 in (6.4 mm)	1/4 in
H42550	50 ft (15.2 m)	1/4 in (6.4 mm)	1/4 in
H4251X	100 ft (30.5 m)	1/4 in (6.4 mm)	1/4 in
H43803	3 ft (0.9 m)	3/8 in (9.5 mm)	3/8 in
H43806	6 ft (1.8 m)	3/8 in (9.5 mm)	3/8 in
H43810	10 ft (3.0 m)	3/8 in (9.5 mm)	3/8 in
H43825	25 ft (7.6 m)	3/8 in (9.5 mm)	3/8 in
H43850	50 ft (15.2 m)	3/8 in (9.5 mm)	3/8 in
H4381X	100 ft (30.5 m)	3/8 in (9.5 mm)	3/8 in
H45010	10 ft (3.0 m)	1/2 in (12.7 mm)	1/2 in
H45025	25 ft (7.6 m)	1/2 in (12.7 mm)	1/2 in
H45050	50 ft (15.2 m)	1/2 in (12.7 mm)	1/2 in
H4501X	100 ft (30.5 m)	1/2 in (12.7 mm)	1/2 in



Color Key:




### Xtreme-Duty 5600 psi (386 bar) High Pressure Hose

Part #	Length	Diameter	Female NPSM
H52503	3 ft (0.9 m)	1/4 in (6.4 mm)	1/4 in
H52506	6 ft (1.8 m)	1/4 in (6.4 mm)	1/4 in
H52510	10 ft (3.0 m)	1/4 in (6.4 mm)	1/4 in
H52525	25 ft (7.6 m)	1/4 in (6.4 mm)	1/4 in
H52550	50 ft (15.2 m)	1/4 in (6.4 mm)	1/4 in
H5251X	100 ft (30.5 m)	1/4 in (6.4 mm)	1/4 in
H53803	3 ft (0.9 m)	3/8 in (9.5 mm)	3/8 in
H53806	6 ft (1.8 m)	3/8 in (9.5 mm)	3/8 in
H53810	10 ft (3.0 m)	3/8 in (9.5 mm)	3/8 in
H53825	25 ft (7.6 m)	3/8 in (9.5 mm)	3/8 in
H53850	50 ft (15.2 m)	3/8 in (9.5 mm)	3/8 in
H5381X	100 ft (30.5 m)	3/8 in (9.5 mm)	3/8 in
H55010	10 ft (3.0 m)	1/2 in (12.7 mm)	1/2 in
H55025	25 ft (7.6 m)	1/2 in (12.7 mm)	1/2 in
H55050	50 ft (15.2 m)	1/2 in (12.7 mm)	1/2 in
H5501X	100 ft (30.5 m)	1/2 in (12.7 mm)	1/2 in

### Xtreme-Duty 7250 psi (500 bar) High Pressure Hose

Part #	Length	Diameter	Female NPSM
H72503	3 ft (0.9 m)	1/4 in (6.4 mm)	1/4 in
H72506	6 ft (1.8 m)	1/4 in (6.4 mm)	1/4 in
H72510	10 ft (3.0 m)	1/4 in (6.4 mm)	1/4 in
H72525	25 ft (7.6 m)	1/4 in (6.4 mm)	1/4 in
H72550	50 ft (15.2 m)	1/4 in (6.4 mm)	1/4 in
H7251X	100 ft (30.5 m)	1/4 in (6.4 mm)	1/4 in
H73803	3 ft (0.9 m)	3/8 in (9.5 mm)	3/8 in
H73806	6 ft (1.8 m)	3/8 in (9.5 mm)	3/8 in
H73810	10 ft (3.0 m)	3/8 in (9.5 mm)	3/8 in
H73825	25 ft (7.6 m)	3/8 in (9.5 mm)	3/8 in
H73850	50 ft (15.2 m)	3/8 in (9.5 mm)	3/8 in
H7381X	100 ft (30.5 m)	3/8 in (9.5 mm)	3/8 in
H75010	10 ft (3.0 m)	1/2 in (12.7 mm)	1/2 in
H75025	25 ft (7.6 m)	1/2 in (12.7 mm)	1/2 in
H75050	50 ft (15.2 m)	1/2 in (12.7 mm)	1/2 in
H7501X	100 ft (30.5 m)	1/2 in (12.7 mm)	1/2 in

## Selecting the Right Xtreme-Duty High Pressure Airless Hose

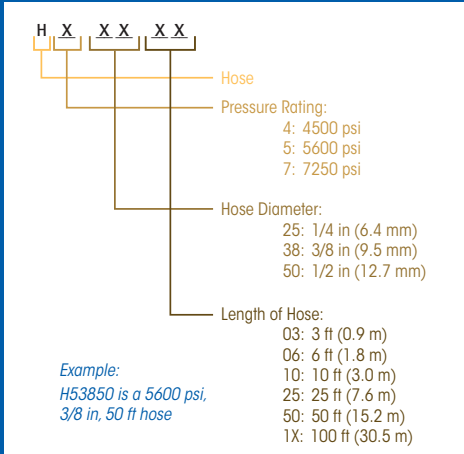

## Graco XTR Guns

Rugged design to handle the toughest protective coatings

- Compact design
- Lightweight and ergonomic
- XTR-5: 5000 psi (345 bar, 34.5 MPa)
- XTR-7: 7250 psi (500 bar, 50.0 MPa)
- Variety of handle and trigger options



### XTR-5 Airless Spray Gun

Maximum working pressure: 5000 psi (345 bar, 34.5 MPa)

- XTR500 1-in round handle, four-finger trigger, no tip
- XTR501 1-in round handle, four-finger trigger, flat tip\*
- XTR502 Oval insulated handle, four-finger trigger, XHD RAC tip\*
- XTR503 Oval insulated handle, two-finger trigger, XHD RAC tip\*
- XTR504 1-in round handle, four-finger trigger, XHD RAC tip\*
- XTR505 1-in round handle, two-finger trigger, XHD RAC tip\*

### XTR-7 Airless Spray Gun

Maximum working pressure: 7250 psi (500 bar, 50.0 MPa)

- XTR700 1-in round handle, four-finger trigger, no tip
- XTR701 1-in round handle, four-finger trigger, flat tip\*
- XTR702 Oval insulated handle, four-finger trigger, XHD RAC tip\*
- XTR703 Oval insulated handle, two-finger trigger, XHD RAC tip\*
- XTR704 1-in round handle, four-finger trigger, XHD RAC tip\*
- XTR705 1-in round handle, two-finger trigger, XHD RAC tip\*

\* Includes 519 tip

**Contact us today!** For more information or to request a demo, call **1-877-844-7226** or visit us online at **www.graco.com**